

LITE

Reverse Cycle Split System



ENERGY RATING		
4.5 ★	HOT climate	3.0 ★
4.0 ★	AVERAGE climate	2.5 ★
4.5 ★	COLD climate	2.0 ★

25 Class Model

EFFICIENT & RELIABLE

This compact and modern system features a contoured matte-white flat panel design, easy-to-use controller and whisper quiet operations.

- 
R32 refrigerant
 66% lower 'Global Warming Potential Factor' than R410A providing less risk of harm to the environment.
- 
Compact size
 Both the indoor and outdoor units feature a more compact design for easier installation.
- 
Coanda airflow
 Discharge louvres are designed to stream air upwards along the ceiling for rapid cooling and uniform temperature distribution.
- 
Whisper quiet
 Indoor Unit Quiet mode that reduces the indoor unit operational noise level down to 19dBA*
- 
Lifestyle convenience
 Room temperature can be set in increments of 0.5°C and an ON/OFF timer for convenient set and forget operations.

Technology

NEW CROSS FLOW FAN


Large diameter rotor with aerofoil blade design delivers larger volumes of air more quietly than ever before.

NEW ODM MOTOR

Compact 10 pole DC outer rotor motor delivers higher torque more efficiently.

REDESIGNED HEAT EXCHANGER

Slit type fin design with Ø5mm piping increases heat exchange area for improved capacity output and energy performance.

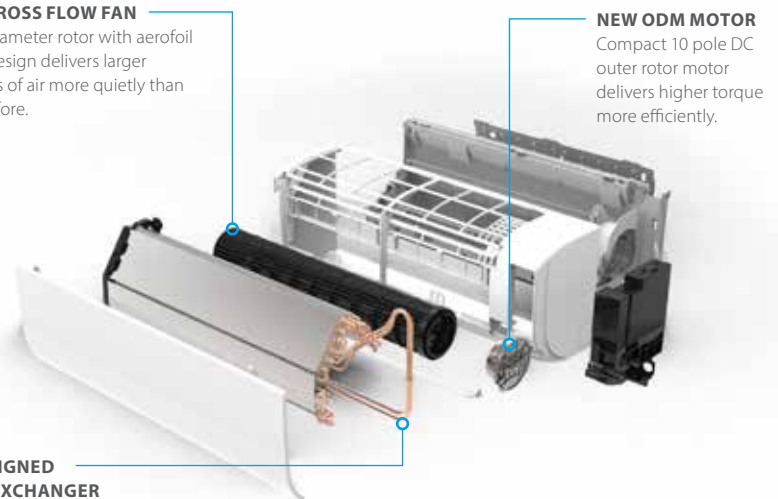

*Refers to 2.0kW, 2.5kW & 3.5kW models in cooling operation.

SPECIFICATIONS



Indoor Unit		FTXF20WVMA	FTXF25WVMA	FTXF35WVMA	FTXF46WVMA	FTXF50WVMA	FTXF60WVMA	FTXF71WVMA	
Outdoor Unit		RXF20WVMA	RXF25WVMA	RXF35WVMA	RXF46WVMA	RXF50WVMA	RXF60WVMA	RXF71WVMA	
Rated Capacity	Cool (kW)	2.0	2.5	3.5	4.6	5.0	6.0	7.1	
	Heat (kW)	2.5	3.0	3.7	4.7	5.2	6.5	8.0	
Capacity Range	Cool (kW)	0.9-2.3	0.9-2.8	0.9-3.7	1.5-5.0	1.5-5.5	1.6-6.5	2.0-7.5	
	Heat (kW)	0.9-2.7	0.9-3.2	0.9-4.0	1.0-5.4	1.0-6.0	1.0-6.7	2.0-8.0	
Indoor Airflow Rate (H)	Cool (l/s)	152	160	173	200	210	313	350	
	Heat (l/s)	160	168	188	203	213	333	350	
Indoor Fan Speeds		5 steps, quiet and automatic							
Star Rating (Hot/Avg/Cold)	Cool	4/3.5/3.5	4.5/4/4.5	4/3.5/3.5	3.5/3/3.5	3.5/3/3	3.5/3.5/3.5	3/3/3	
ZERL (Residential)	Heat	3/1.5/1	3/2.5/2	3/2.5/2	3/2.5/2	3/2.5/1.5	3/2/1.5	3/2.5/1.5	
Front Panel Colour		Pearl Pure White							
Power Supply		1 phase, 220-240V, 50Hz							
Power Input (Rated)	Cool (kW)	0.51	0.53	0.91	1.28	1.44	1.71	2.14	
	Heat (kW)	0.59	0.63	0.86	1.25	1.44	1.73	2.12	
E.E.R./C.O.P	Cool/Heat	3.92/4.24	4.72/4.76	3.85/4.30	3.59/3.76	3.47/3.61	3.51/3.76	3.32/3.77	
T.C.S.P.F (Residential)	Hot/Avg/Cold	5.55/5.12/5.31	6.31/5.85/6.03	5.52/5.19/5.45	5.13/4.81/5.04	5.02/4.73/4.97	5.40/5.08/5.40	4.96/4.67/4.94	
H.S.P.F (Residential)	Hot/Avg/Cold	4.64/3.21/2.67	4.95/4.41/3.72	4.87/4.36/3.74	4.89/4.32/3.82	4.67/4.06/3.48	4.66/4.00/3.38	4.88/4.05/3.35	
A.E.E.R./A.C.O.P	Cool/Heat	3.89/4.21	4.68/4.73	3.83/4.28	3.58/3.74	3.46/3.59	3.50/3.74	3.30/3.76	
Dimensions (HxWxD)	Indoor (mm)	285x770x223					295x990x263		
	Outdoor (mm)	550x675x284			595x845x300			695x930x350	
Weight	Indoor (kg)	9	9	9	9	9	12	13	
	Outdoor (kg)	27	28	28	41	41	41	54	
Compressor Type		Hermetically Sealed Swing Type							
Refrigerant Type		R32							
Max Pipe Length	(m)	20	20	20	30	30	30	30	
Max Level Difference	(m)	15	15	15	20	20	20	20	
Pipe Sizes	Liquid (mm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4	
	Gas (mm)	9.5	9.5	9.5	12.7	12.7	12.7	12.7	
Outdoor Operating Range	Cool (°CDB)	-10 to 46							
	Heat (°CWB)	-15 to 18							
Indoor Sound Level (H/SL)	Cool (dBA)	39/19	40/19	42/19	44/28	45/28	46/29	49/30	
	Heat (dBA)	39/20	40/20	42/20	44/28	45/28	46/29	49/30	
Outdoor Sound Level (H/SL)	Cool (dBA)	47/43	47/43	48/44	47/44	47/44	49/46	53/47	
	Heat (dBA)	48/44	48/44	49/45	50/46	50/46	51/47	54/49	
Outdoor EPA Sound Power Level (H)	Cool (dBA)	59	59	60	59	59	61	65	
	Heat (dBA)	60	60	61	62	62	63	66	

ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating as outlined in the GEMS 2019 Determination.

Notes:

- The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
- The cooling (or heating) output capacity will be reduced below the rated value as the outdoor temperature approaches the maximum (or minimum) outdoor temperature operating range limit.
- The specifications, designs & information in this flyer are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this flyer may vary slightly.

CONTACT



Advanced Air Conditioning

Unit 3/263 Toombul Road
NORTHGATE, Queensland AUSTRALIA 4013

(07) 3256 6033
www.advair.com.au



Daikin Australia Pty Limited ABN 62 000 172 967

For all Sales enquiries, email: sales@daikin.com.au

For Customer Service of Technical Support, call: 1300 368 300

Want to learn more about our product range?

Subscribe to our YouTube Channel or go to daikin.com.au

